
# DAILY 4X4

## 55SI5 WH CHASSIS CAB EURO 3

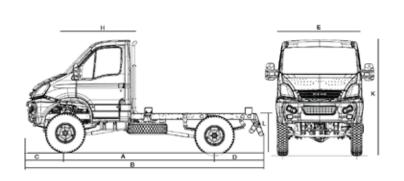


DIMENSIONS (mm)			
Α	Wheelbase	3400	
В	Overall length	5432	
С	Front overhang	900	
D	Rear overhang	1132	
Е	Maximum cab width	2016	
Н	Front axle to body	1492	
K	Overall height (unladen)	2634	
L	Frame height (unladen)	1109	
	Cab to rear axle (CA)	1784	
	Approach angle (degrees) wihout sump protection	51	
	Departure angle (degrees) with lifted rear underrun	41	
	Ground clearance - front	300	
	Ground clearance - rear	300	
Depth of water Bank angle (degrees)		660	
		145	
	Turning circle (k to k) (m)	12.2	
	Turning circle (w to w) (m)	13.2	
	Maximum body width - Standard	2200	
	Maximum body width - Optional	2300	
	Recommended max body length	3266	

PLATED WEIGHTS (Kg)		
Front axle	2450	
Rear axle	3700	
GVM	5500	
GCM	9000	

KERB WEIGHTS (Kg)		
Front axle	1725	
Rear axle	820	
Total	2545	
Maximum body and payload	2955	
Kerb weights are with full fuel tank, oil, water, spare wheel, tools and include driver @ 75kgs		





ENGINE			
Fuel	Diesel		
Capacity (litres)	3.0		
Cylinders	4 (16 valves)		
Emission compliance	Euro 3		
Fuel system	Common rail		
Power (HP/kW)	146/107		
@rpm	3000-3500		
Torque (Nm)	350		
@rpm	1400-2600		
Waste-gate turbo with intercooler			



## DAILY 4X4 55S15 WH CHASSIS CAB EURO 3

## **GEARBOX**

Type 6S400OD, 6 speed

Synchromesh

Overdrive

 1st gear
 5.37:1

 Top gear
 0.79:1

**CLUTCH** 

Type Solid, Single reduction

Axle ratio 4.87

Differential lock Standard on front and rear axles

Remote mounted breathers

## SUSPENSION

Front Parabolic leaf
Rear Parabolic leaf
Anti-roll bar Front and rear
Shock absorbers Front and rear

#### **BRAKES**

Front Diameter ventilated disc brakes/

297mm

Rear Diameter drum brakes/

270mm

ABS + EBD Standard

Parking brake on rear axle

## **STEERING**

Type Power assisted - Recirculated ball

## **WHEELS AND TYRES**

Wheels  $6.5H \times 16$ 

Tyres Standard 255/100R16 - Full off-road

tread

## **LIGHTING AND SIGNALLING**

Halogen head lamps Twin rear fog lamps Twin reverse lamps

## **FUEL SYSTEM**

Tank 90 litres on left side, with locking

fuel cap

## **ELECTRICS**

Alternator Std 14v-140A
Battery 12v-110Ah
Towing electric socket (13 pin) Standard

## **TRANSFER BOX**

Wheels 6.5H  $\times$  16 On Road - normal ratio 1:1 On Road - low ratio 1:1.244 Off Road - normal ratio 1:3.115 Off Road - low ratio 1:3.866

Total ratios 24, in combination with gearbox

atio

Torque distribution - front 32%
Torque distribution - rear 68%
Central differential lock standard

## STANDARD EQUIPMENT

#### Cab

Dual passenger seat with headrests. Optional single passenger seat. Fully adjustable suspension driver's seat with headrest. Large dual storage pockets in doors. Three point inertia reel belt on front seats. Single piece floor mat. Exterior mirrors with integrated wide angle and direction indicators with kerbside observation mirror to nearside. 2 cup holders, Underseat storage, Bottle holder Glove compartment with added storage. A4 storage compartment. Additional in-dash storage. Clip holder. Rear panel with small window. A Pillar grab handles for driver & passenger Low entry driver and passenger exterior step.

## **Dashboard incoporates:**

Dash-mounted gear lever RDS stereo radio/CD player (with Can security). Coolant temperature indicator. Speedometer. Rev. counter. 2 DIN drawers which can carry CD Player and/or tachograph -model dependent, Air conditioned climate control, Body builder connectors Front mudflaps, Overhead windscreen storage rack and DIN drawer, Sump guard. Comfort dashboard (Standard with CRT). LCD panel additions include: dual trip function; servicing indicator; door locking function; speed alarm; external temperature display and ice warning indicator are also shown.

## Construction and finish

Anti-corrosion protection includes full catephoretic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. Steel bumper and side mouldings.

## Chassis

Flat topped heavy duty high tensile reinforced steel c-section boxed frame complete with pedestal body mounting brackets. Side mounted spare wheel and carrier. Tubular rear under ride guard with off road adjustment.

## Security

Central locking with remote control and door locking management, anti-theft system (Optional), Engine immobiliser, Steering lock.

