




**DAILY 50C17 CV / 50C17 CV/P EEV
AXESS VAN**

SPECIFICATION SHEET

IVECO

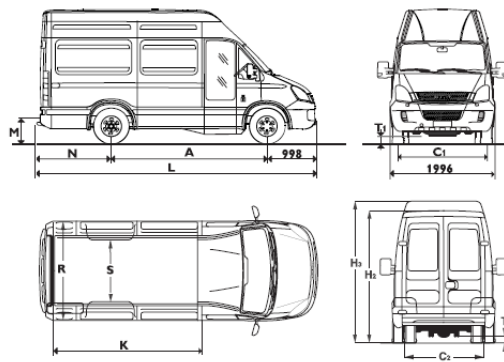

DIMENSIONS (mm)

A	Wheelbase	3950	
	Roof	H₂	H₃
L	Overall length	7012	
H	Overall height to top of cab, unladen	2745	2930
C1	Front Track	1696	
C2	Rear Track	1540	
T1	Minimum ground clearance (front), unladen	245	
T2	Minimum ground clearance (rear), unladen	240	
N	Rear overhang	2064	
M	Rear loading height	735	
	Turning circle kerb to kerb	14020	
	Turning circle wall to wall	15140	

Cargo Area

	Capacity (m³)	15,6	17,2
K	Internal length	4540	
R	Internal width (max / on the floor)	1800 / 1750	
	Internal height	1900	2100
S	Distance between wheel arches	1030	
	Length of wheel arches	890	

Rear doors

	Opening width	1540	
	Opening height	1780	1990

Plug doors

	Opening width	660	
	Opening height	1830	


WEIGHTS (kg)

	GVW	5200	
	GTW	8700	
	Front axle capacity	1900	
	Rear axle capacity	3700	
	Towing capacity unbraked	750	
	Towing capacity with inertia brake	3500	
	Support loading capacity	250	
	Roof loading capacity	150*	
	Kerb Weight Total	2570	2610
	Kerb weight Front Axle	1425	1425
	Kerb weight Rear Axle	1145	1185
	Payload	2630	2590

Kerb weights are with full fuel tank, water, oil, tools and include driver (75 kg). Kerb weights are subject to a manufacturing tolerance of +/- 5%

Weights refer to the standard version without special requests

* Only for vehicles with H₂ roof height

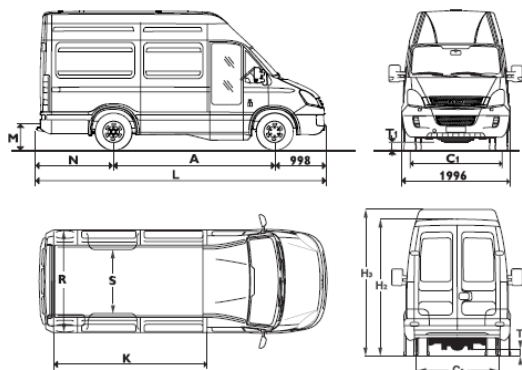

DIMENSIONS (mm)

A	Wheelbase	3950	
	Roof	H ₂	H ₃
L	Overall length	7012	
H	Overall height to top of cab, unladen	2595	2785
C1	Front Track	1696	
C2	Rear Track	1541	
T1	Minimum ground clearance (front), unladen	196	
T2	Minimum ground clearance (rear), unladen	177	
N	Rear overhang	2064	
M	Rear loading height	-	
	Turning circle kerb to kerb	14020	
	Turning circle wall to wall	15140	

Cargo Area

	Capacity (m ³)	15,6	17,2
K	Internal length	4540	
R	Internal width (max / on the floor)	1800 / 1750	
	Internal height	1900	2100
S	Distance between wheel arches	1030	
	Length of wheel arches	890	

Rear doors

	Opening width	1540	
	Opening height	1780	1990

Plug doors

	Opening width	660	
	Opening height	1830	

WEIGHTS (kg)

	GVW	5200	
	GTW	8700	
	Front axle capacity	1900	
	Rear axle capacity	3700	
	Towing capacity unbraked	750	
	Towing capacity with inertia brake	3500	
	Support loading capacity	250	
	Roof loading capacity	150*	
	Kerb Weight Total	2570	2610
	Kerb weight Front Axle	1425	1425
	Kerb weight Rear Axle	1145	1185
	Payload	2630	2590


Kerb weights are with full fuel tank, water, oil, tools and include driver (75 kg). Kerb weights are subject to a manufacturing tolerance of +/- 5%

Weights refer to the standard version without special requests

* Only for vehicles with H₂ roof height

Engine

Fuel	Diesel
Capacity (litres)	3.0
Cylinders	4 (16 valves)
Emission Compliance	EEV
Fuel System	Common rail. Generation 2
Power	170 HP / 125 kW
at	2.990 - 3.500 rpm
Torque	400 Nm
at	1.250 - 2.990 rpm
Exhaust system	Side emit - RHS
Exhaust with CRT	Standard

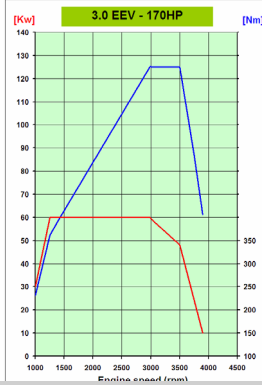

Gerboxes

Type	FPT 2840.6	or	6AS 400 OD (opt.)
	Manual 6 speed		Automated 6 speed
	Synchronized		Synchronized
	Overdrive		Overdrive
1 st gear	5,373 : 1		5,373 : 1
Top gear	0.791 : 1		0.791 : 1

Performance

Gear	1 st	Top
Max. geared speed (km/h)	23,1	157
Gradeability at max. torque	44%	6,5%

Power Take-Off

Facility for side mounted gearbox PTO. Max. torque output: 180 Nm

Clutch

Type	Hydraulic
Diameter	11" (279,5 mm)
Total contact surface	772 cm ²

Fuel tank 70 liters with locking cap

Other equipment

Cab

- Drivers airbag with seat belt pretensioners
- Fully adjustable driver's seat with headrest
- Large dual storage pockets in driver's doors
- Three point inertia reel belt on all driver's seat
- Exterior mirrors - heated and electrically adjustable with integrated wide angle and direction indicators
- Single piece floor mat
- Windows electrically operated
- 2 cup holders, bottle holder
- Glove compartment with added storage
- A4 storage compartment
- Additional in-dash storage
- Cooled compartment (with opt. air conditioning)
- Clip holder
- Unimpeded access to cargo area
- Fully glazed electrically opened plug doors

Heating & Ventilation

- Four speed fan with 5 different distribution modes and cab recirculation
- Windshield and side window defrost facility
- Fresh air ventilation when heater turned off

Dashboard incorporates

- Dash-mounted gear lever
- Provision for GPS or tachograph
- Coolant temperature indicator
- Speedometer
- Rev. counter
- Tachograph – digital
- 3 DIN drawers, two of which can carry CD Player and/or tachograph

- Comfort LCD Display Panel (see description under Options)

Security

- Engine immobiliser
- Steering lock
- Unglazed rear doors
- Ladder type bulkhead behind driver

Load area

- Access via nearside front electric plug door
- Floor - steel ribbed with load lashing rings
- Sides - reinforced with load lashing rings
- Rear access by hinged doors with stops at 90 and 270 degrees and grab handle
- Interior lights at side and rear (door operated with individual isolation)

Construction & Finish

C-section steel longitudinal side members and tubular cross members with pressed steel unitary construction body mounted on rubber bushes. Anti-corrosion protection includes full catheporetic dipping with galvanized boxed sections and strategic use of zinc plated panels in vulnerable areas. Protective under seal for all under body cabin area, wheel housings and engine area. SMC bumper and side mouldings.

Electrical system

Voltage	12V
Battery	12V -110Ah
Alternator STD	14V -110A (1260W)
Alternator opt	14V - 140A or 180A
Starter	12V - 2,2kW (3,0 HP)

Lighting & Signaling

Halogen headlights; front fog lamps; twin rear fog lamps; twin reverse lamps. Bodybuilder connector

Suspension

Front	Independent with torsion bar
Rear	Parabolic leaf spring or Air suspension
Anti-roll Bar	Front and rear
Shock Absorbers	Front and rear

Braking system

Front / diameter	Ventilated disc brakes / 290 mm
Rear / diameter	Disc brakes / 289 mm
Anti-lock braking system (ABS) with traction control (ASR) and Electronic Brake force distribution (EBD). Electronic Stability Program (ESP) with hydraulic brake assist (HBA) and Motor torque reduction (MSR)	
Parking brake	On rear axle

Steering

Power assisted

AXLES

Front axle	Steering axle, Double wishbone
Rear axle	Drive axle, Full-floating single reduction.
Axle Ratio (Standard):	i=3,62
Other ratios -	optional.

Wheels/ Tyres (Standard)

Tyres:	front and rear single	195/75 R 16
Wheels:	disc wheels	5 J x 16 H1
Spare wheel	standard	

Options

- Agile automated 6-speed gearbox
- Air conditioning
- Central locking with remote control and door locking management - anti-theft system
- Alarm system to cab and load area
- Ambient air temperature gauge (option with air conditioning)
- Blue Tooth vivavoice system with steering wheel controls
- Comfort dashboard (Standard with CRT) LCD panel additions include: dual trip function; servicing indicator; door locking function; speed alarm; fuel economy indicator; external temperature display and ice warning indicator are also shown only when climate control is specified. Automated gearbox information is also displayed when Agile gearbox is specified.
- Blue & me
- Colour keyed bumper and trim
- ECAS air suspension on rear axle
- GPS satellite navigation
- Headlamp washers
- Reverse parking sensor integrated into rear step
- Rear camera and spot light
- Tow bar with ball
- Towing electric socket (13 pin)

For a complete list of Daily options please contact your local Iveco distributor

DAILY

50C17 CV / 50C17 CV/P EEV
AXESS VAN

IVECO