



Illustration may contain optional features to the model.

ENGINE*

Power: 450hp @ 1,900rpm
Torque: 2,200Nm @ 1,000rpm

TRANSMISSION

16 Speed Automated

MASS RATINGS

GVM: 32,000kg
GCM: 60,000kg

WHEELBASE

4,500mm

KEY FEATURES

- Electronic Braking System with Off-road Mode
- ITB Engine Brake. Transmission Intarder Optional
- Compliant to Euro VI_STEP E Emission Standard
- Full LED Headlights with Cornering Fog Lights
- 7" Infotainment System with Apple CarPlay®, Android Auto®
- Climate Control HVAC System
- IVECO Telematics


WARRANTY

- Standard Warranty
2 years / 500,000km / 5,000 hours (whichever occurs first)
- Extended Warranty (Optional)
4 years / 500,000km / 10,000 hours (whichever occurs first)

*For available options & details see the next pages.

ENGINE

Engine Model	Cursor 13
Total Displacement	12,900cm ³
Maximum Power	450hp (331kW) @ 1,900rpm
Maximum Torque	2,200Nm (224Kgm) @ 1,000rpm

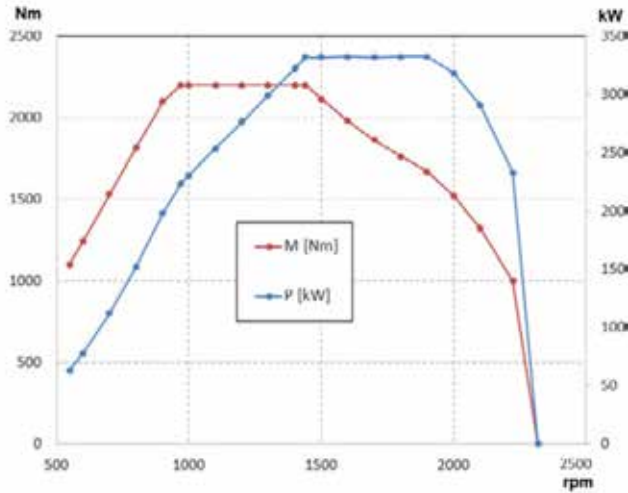

Injection Type	Direct
Fuel Injection System	Common Rail
Bore & Stroke	135 & 150mm
After-Treatment System	Hi-e SCR After-Treatment System with
	DOC: Diesel Oxidation Catalyst
	DPF: Diesel Particulate Filter
	SCR: Selective Catalytic Reduction
	CUC: Clean Up Catalyst
Emission Compliance	Euro VI STEP E

TRANSMISSION

Description	Standard: 16 Speed Automated	
Make & Model	Standard: ZF Traxon 16TX 2240 TO	
Clutch	Single Dry Plate, Outer Diameter: 430mm	
Shifter Type	Dash Mounted Electronic Shifter with Column Mounted Sequential Shifter	
	1st: 14.68	9th: 3.22
Gear Ratios: Traxon 16TX 2,440 TO	2nd: 12.05	10th: 2.64
	3rd: 9.92	11th: 2.17
	4th: 8.14	12th: 1.78
	5th: 6.78	13th: 1.49
	6th: 5.56	14th: 1.22
	7th: 4.57	15th: 1.00
	8th: 3.75	16th: 0.82
	Rev 1: 14.14	Rev 3: 3.10
	Rev 2: 11.61	Rev 4: 2.54

TRANSFER

Model Name	TC 2200
Number of Speeds	2
OFF ROAD / Low Ratio	1.6
ON ROAD / Normal Ratio	1.0

DRIVE AXLE(S) RATIO

Drive Axle(s) Ratio	4.23
---------------------	------

PERFORMANCE

Turning Circle (Kerb to kerb)	22,300mm
Engine RPM @ 100km/h	1,763
Road Speed Limiter	100km/h, Conforms to ADR65
Gradeability ¹ @ Rated GVM	100% (with 1:6 Transfer Ratio)
Gradeability ¹ @ Rated GCM	64% (with 1:6 Transfer Ratio)
¹ This is theoretically calculated. Actual performance may vary under different conditions.	

AXLE & SUSPENSION

Front Axle Model & Type	IVECO 5985/2D Drive Axle - Hub Reduction
Front Suspension	Parabolic Suspension with Dampers
FA & Suspension Capacity	8,000kg
Front Stabiliser Bar	Equipped, Diameter: 40mm
Rear Axle Model & Type	IVECO 453291/2D - Tandem - Hub Reduction
Rear Suspension	4 Leaf Parabolic Suspension
RA & Suspension Capacity	26,000kg
Rear Stabiliser Bar	Equipped, Diameter: 50mm
Diff Locks on Drive Axles	Equipped
Road Friendly Suspension	N/A

BRAKES & AUXILIARY BRAKES

Type/Control	Full Air/Electronic Braking System (EBS)	
	- Off Road Mode	
	- ABS (Anti-Lock Braking System)	
	- ASR (Anti-Skid Regulator)	
	- DBI (Direct Brake Integration)	
	- BAS (Brake Assistant System)	
	- BVR (Brake Lining Wear Adjustment)	
	- ARB (Hill Holder) - if Fitted and Only with AMT Gearbox	
	Front Axle	Drum Brakes 410mm / Friction Area: 2,884cm ²
	Rear Axle	Drum Brakes 410mm / Friction Area: 3,220cm ²
Engine Brake	Equipped	
Transmission Intarder	Equipped	

CHASSIS

Dimensions	309 x 80 x 10mm
Chassis Width (at Rear)	776mm
Material	Steel
Tensile Strength	610 N/mm ²
ATS Location	LHS Chassis
Type/Control	Standard: Vertical
	Optional: Horizontal
Air Tanks	Aluminium
Front Tow Hook	Equipped
Towing Cross Member	Equipped

WHEELS & TYRES

Rim Type	Steel Wheel - PCD 335mm
Rim Size	Front 11.75" x 22.50"
	Rear 9.00" x 22.50"
Tyre Size	Front 385/65 R 22.5
	Rear 315/80 R 22.5

ADBLUE® TANK

Fuel Tank with Lockable Cap	390L
AdBlue® Tank	60L

SAFETY FEATURES

Lane Departure Warning System (LDWS)	Optional
Tyre Pressure Monitoring System (TPMS)	Optional
Reverse Buzzer	Equipped
Daytime Running Lamp (DRL)	Equipped
ECE-R29.03 Cab Strength Certification	Equipped

ELECTRICAL & ELECTRONICS

Voltage	24V System
Batteries	2 x 12 Volt / 170Ah Batteries
Electrical Battery Cutout	Equipped
Battery Position	Horizontal on Side Frame -LHS
Alternator	28 Volt / 90A
Fleet Management System Data Interface (FMS)	Equipped
Chassis Mounted Jump Start Plug	Equipped
CAN OPEN Bodybuilder Interface	Equipped
LED Headlamp - Low Beam	Equipped
LED Headlamp - High Beam	Equipped
Daytime Running Lamp (DRL)	Equipped
Fog Light with Cornering & Bending	Equipped
LED Rear Lights	Equipped
Provision for Roof Rotating Lights	Equipped with Harness & Switch Optional: 2 x Roof Rotating Lights
Chassis Mounted Pneumatic Horn	Equipped
7-Pin Trailer Connection	Equipped
USB Charging Ports (TYPE A)	Equipped
12 Volt Power Socket	Equipped

STEERING

Adjustable Steering Column	Equipped
Steering Wheel	Leather Steering Wheel with following: - Controls for the Information Screen - Controls for the Phone - Activation for Voice Recognition - Controls for Radio / Media Volume

CAB EXTERIOR

Cab Type	Day Cab with Low Roof - 2,300mm Wide Optional: Sleeper Cab
Cab Tilt Mechanism	Servo Assisted Cab Tilt Mechanism
Cab Mounting	Mechanical Spring Suspended Fron and Rear
Windscreen Wipers	Automatic - Rain Sensing 2 Speed with Integrated Washer Nozzles
Front Bumper	Steel Front Bumper with Foldable Step
Headlight Protection Grid	Equipped
Rearview Mirrors	2 x Motorised, Heated Main Mirrors & Convex Spotters 1 x LHS Kerb View & Front View Mirrors
External Sunvisor	Equipped
Colour	White IC 194


CAB INTERIOR

Seating Capacity	Two Optional: Three (Only with AD Cab)
Driver Seat	Fabric, Air Suspended, Heated, 3-Way Adjustable Seat
Passenger Seat	Fabric, 3-Way Adjustable Seat
Seat Belt	3-Point Lap / Sash Type
Multimedia Unit	7" LCD HD Touch Screen Display DAB + AM / FM Radio USB Input, Bluetooth® Connectivity Smart Phone Mirroring -Apple CarPlay® -Android Auto® Voice Recognition In Built TomTom Satellite Navigation System Reverse/Side Camera Compatible
HVAC System	Equipped - with Climate Control
Immobiliser	Equipped - with 3 x Remote Central Lock Keys
Power Windows	Equipped
Roof Hatch	Equipped
Cup Holders	Equipped
Interior Lighting	Equipped
Rollup Sun Blinds for Doors	Equipped - for the Doors
Sleeper Berth	Equipped - with Sleeper Cab Only
25L Refrigerator	Equipped - with Sleeper Cab Only
Bunk Curtains	Equipped - with Sleeper Cab Only

IVECO TELEMATICS

Smart Connectivity Pack (Included for 5 Years)	Equipped. Features Include: - MYIVECO Smart Report - MYIVECO Web Portal & Mobile App - MYIVECO Vehicle Monitoring & Remote Assistance - MYIVECO Easy Way App
--	--

Application: Rigid

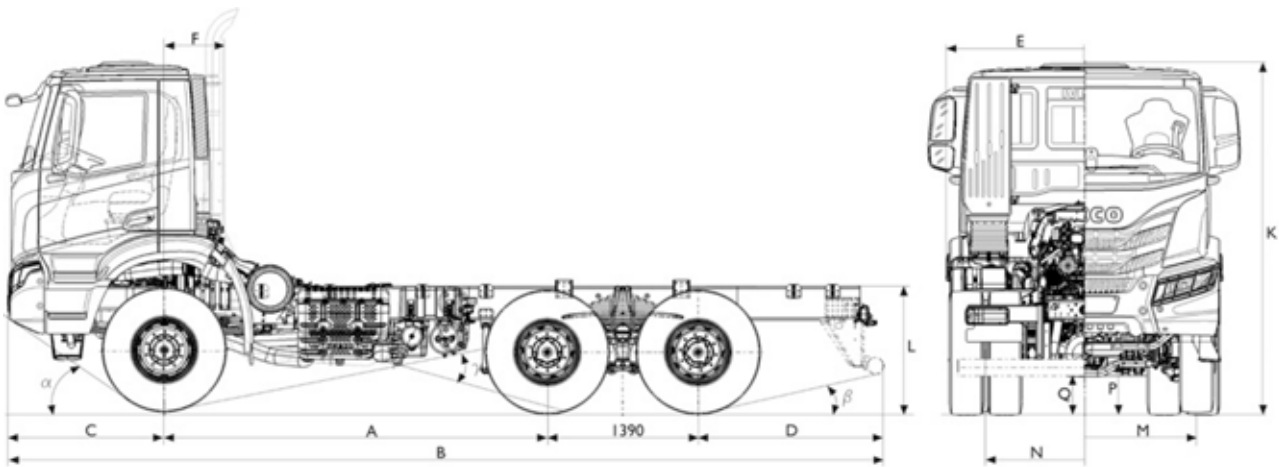

DIMENSIONS & WEIGHTS

Wheelbase (A)	4,500mm
Overall Length (B)	9,597mm
Max Width Over Fenders (E)	2,500mm
Front Axle to Back of Cab (F)	580mm
Frame Height at End of Frame, Unladen (L)	1,169mm
Front Overhang (C)	1,440mm
Rear Overhang (D)	2,075mm
Minimum Ground Clearance (Front) (P)	346mm
Minimum Ground Clearance (Rear) (Q)	286mm
Overall Height to Top of Cab, Unladen (K)	3,213mm
Turning Diameter Kerb to Kerb	22,300mm
Turning Diameter Wall to Wall	23,900mm
Front Track (M)	1,981mm
Rear Track (N)	1,827mm
Approach Angle α (°)	33°
Departure Angle β (°) with OPT: 194	8°
Ramp Angle γ (°)	19°
Total Vehicle Kerb Weight*	10,257kg
Kerbweight on Front Axle*	5,589kg
Kerbweight on Rear Axle*	4,668kg
Gross Vehicle Mass (Plated)	33,500kg
Gross Combination Mass (Plated)	60,000kg

*Indicative chassis tare mass with Standard options, without fuel, Adblue[®] and driver. $\pm 3\%$ tolerance apply.
Mass of the optionals: AT low roof cab 97kg

VERSION: 13 VERSION DATE: 04/2024

IVECO TRUCKS AUSTRALIA LIMITED TRADING AS IVECO TRUCKS NEW ZEALAND.
1 JERRY GREEN ST, WIRI, AUCKLAND 2104, NEW ZEALAND. PHONE: 0800 2 IVECO. WWW.IVECO.CO.NZ

THE INFORMATION IN THIS DOCUMENT WAS CORRECT AT THE DATE OF REVISION. THE DATA IN THIS DOCUMENT IS APPROXIMATE. IF AN EXACT WEIGHT OR DIMENSION IS REQUIRED PLEASE CONTACT IVECO NZ. ALWAYS CONSULT IVECO NZ FOR THE LATEST INFORMATION ON THE VEHICLE BEFORE DECIDING TO PLACE AN ORDER.

OVERSEAS IMAGES AND ILLUSTRATIONS ARE SHOWN THROUGHOUT THIS DOCUMENT AND IMAGES MAY REFER TO EQUIPMENT THAT IS OPTIONAL.
THE MODELS DESCRIBED CAN BE SUBJECT TO MODIFICATIONS WITHOUT ANY NOTICE BY THE MANUFACTURER. IVE3073-S1665S. 04/2024