

DAILY E6 TRADIE-MADE SPECIFICATIONS



IVECO
Drive the road of change

DAILY E6

Specifications 45C SINGLE CAB CHASSIS

Dimensions (mm)

45C Single Cab Euro VI

A Wheelbase	3000	3750
B Overall Length	5418	6593
C Front Overhang	1049	1049
D Rear Overhang	1370	1795
E Overall Width (cab)	2010	2010
H Front axle to front of body	1355	1355
K Overall Height unladen	2279	2264
L Frame height at end of frame unladen	765	768
M Front Track width	1724	1724
N Rear Track	1542	1542
P Front ground clearance	182	182
Q Rear Ground Clearance	168	168
Turning circle kerb to kerb	11116	13466
Turning circle wall to wall	11730	14090


Mass (kg)

GVM	4495	4495
GCM	7995	7995
Towing Capacity with braked trailer	3500	3500
Front axle capacity	2100	2100
Rear axle capacity	3400	3400
Kerb mass front axle	1406	1444
Kerb mass rear axle	695	691
Kerb mass total	2101	2135
Payload capacity	2168	2056

Tray Dimensions (mm)

3173 Tray 4223 Tray

Internal width	2057	2057
External width	2218	2218
Internal length	3000	4050
Overall tray length	3173	4223
Internal load restraint points	10 per side	12 per side

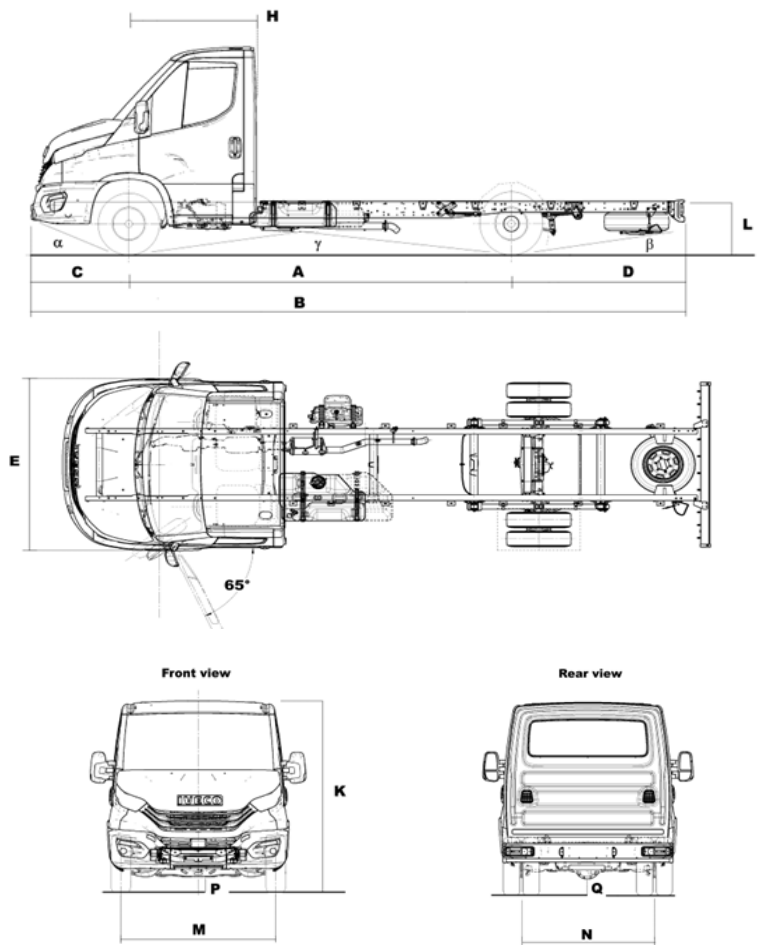

DAILY E6

Specifications 45C DUAL CAB CHASSIS

Dimensions (mm)

45C Dual Cab Euro VI

A Wheelbase	4100
B Overall Length	6993
C Front Overhang	1048
D Rear Overhang	1845
E Overall Width (cab)	2052
H Front axle to front of body	2105
K Overall Height unladen	2661
L Frame height at end of frame unladen	759
M Front Track width	1724
N Rear Track	1542
P Front ground clearance	182
Q Rear Ground Clearance	168
Turning circle kerb to kerb	14564
Turning circle wall to wall	15190


Mass (kg)

GVM	4495
GCM	7995
Towing Capacity with braked trailer	3500
Front axle capacity	2100
Rear axle capacity	3400
Kerb mass front axle	1580
Kerb mass rear axle	763
Kerb mass total	2343
Payload capacity	1864

Tray Dimensions (mm)

3923 Tray

Internal width	2057
External width	2218
Internal length	3750
Overall tray length	3923
Internal load restraint points	12 per side

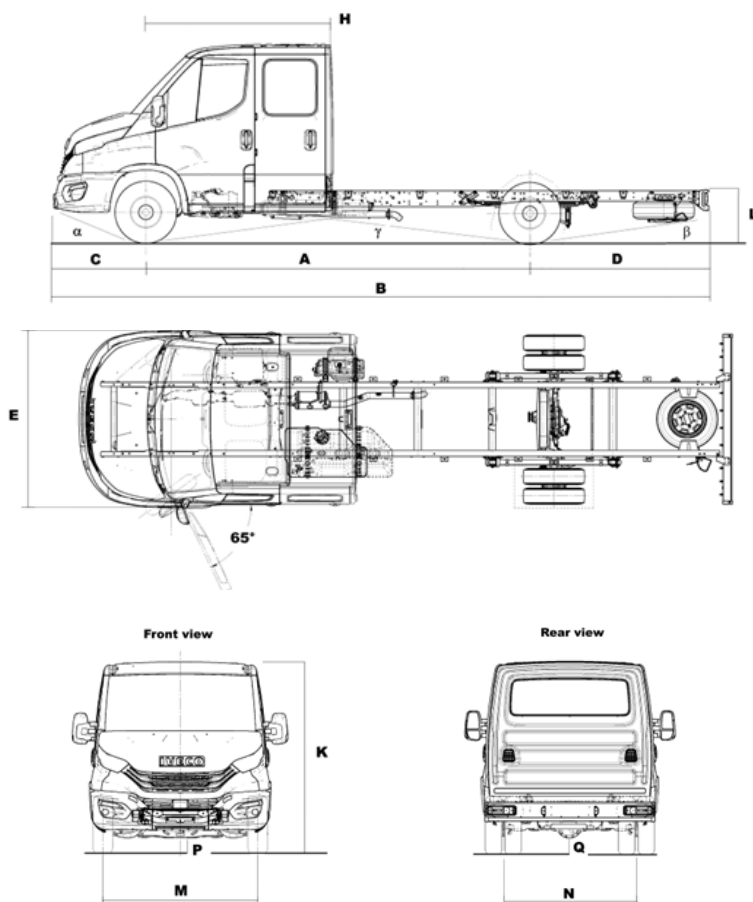

DAILY

Specifications 45C SINGLE & DUAL CAB

Engine

I80EVID FIC Euro 6 Heavy Duty engine with variable geometry turbine (VGT)

Maximum Output: 132 kW (180 HP) @ 3500 rpm

Maximum Torque: 430 Nm (317 ft-lbs) @ 1500 rpm

Emissions Technology: Exhaust Gas Recirculation and Selective Catalytic Reduction

Total Displacement: 3.0 litre

Exhaust: Muffler horizontally positioned on the right side and tailpipe located mid-way down right side of vehicle

Transmission

8-speed ZF Torque Converter Automatic (Hi-Matic 8HP70L)

Type: 8HP70L. 1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1, 7th 0.839 -O.D. 8th 0.667 - D.O.D, rev. 3.297

Steering

Type: Electric Power Steering (EPS)

Diameter: 380 mm diameter steering wheel with tilt and telescopic adjustment

Chassis

Type: C Section steel longitudinal side members and tubular cross members

Electrical System

Type: 12V

Battery: 12V-110 Ah (Smart-charging)

Smart Alternator: 12V-220 A

Trailer Wiring: Wiring to rear of chassis

Safety

- **ESP9** - includes ABS (Antilock Braking System), EBD (Electronic Brake force Distribution), ASR (Anti Slip Regulator), MSR (Motor Drag torque control) Hill Holder (Assisted uphill departure), HBA (Hydraulic Brake Assist), LAC (Load Adaptive Control), TSM (Trailer sway mitigation), RMI (Roll Movement Intervention), & ROM (Roll Over Mitigation)
- Four SRS airbags
- Advanced Emergency Braking System (AEBS)

Wheels & Tyres

Wheels: Steel 5.5J x R16

Cabin Features

- Driver, passenger and curtain airbags with seat belt pretensioners
- Suspended, heated and fully adjustable driver seat with armrest
- Suspended, heated and fully adjustable passenger seat with armrest (dual cab)
- Bench seat with two occupant capacity, under seat storage and fold down table (single cab)
- Second row seating for up to four passengers (dual cab models)
- Adaptive cruise control
- Electric windows
- Exterior mirrors with integrated wide angle and direction indicators, heated and electronically adjustable
- Overhead console with storage shelf
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- 2 cup and 2 bottle holders
- Air conditioning
- Electronic parking brake
- Ecoswitch Pro
- 2 spotlights
- 4 loud speakers

Lights

- Daytime running lights

Dashboard

- 3.5" TFT display and silver dial rings
- TFT Display Panel includes: digital speedometer, ADAS (Advanced Driver-Assistance Systems) dashboard, ADAS quick menu, oil, battery and service information. Navigation and phone multimedia, fuel economy, trip computer, vehicle settings, display settings and diagnostics.
- Engine oil level display
- Hi-Connect Multimedia System - Apple CarPlay, Android Auto, DAB Radio, MP3 player, USB and AUX connectivity, Bluetooth with steering wheel controls
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash

Security

- Central locking with remote control
- Steering lock
- Engine immobiliser

Fuel System

- 100 litres with fuel cap location on passenger side (70 litres on 3000mm wheelbase)
- 20 litre Adblue



Disclaimer:

IVECO Trucks Australia Pty Ltd. ABN 86 004 065 061 ("IVECO") distributes IVECO trucks in Australia and New Zealand. The information and images in this document are provided as a guide only. IVECO reserves the right to make changes at any time without notice to the information contained in this document for any commercial reasons. Always consult your authorised IVECO Dealer to ensure the specifications, equipment, options, and design features including colour, are available for the vehicle before deciding to place an order, some options may only be available in combination with others. Overseas images are shown throughout this document and the images may include equipment which is not optional. To the extent permitted by law to do so, IVECO shall not be liable to any person because of reliance on the content contained in this document.