



8x4 RIGID
530hp



Illustration may contain optional features.

ENGINE

Power: 530hp (387kw) @1,900rpm
Torque: 2,400Nm @950rpm

TRANSMISSION

12 Speed Automated

MASS RATINGS

GVM 30,000kg
GCM 60,000kg

WHEELBASE

6,300mm (NZ)

KEY FEATURES

Compliant to Euro V1 STEP E Emission Standard

GPS Predictive Drive

Advanced Emergency Braking System

Adaptive Cruise Control

Lane Departure Warning

Full LED Headlights with Cornering Fog Lights

7" Infotainment System with Apple CarPlay®, Android Auto®

Climate Control HVAC System

WARRANTY

Standard Warranty

3 Years / 750,000km (whichever occurs first)


MAINTENANCE & REPAIR CONTRACTS (OPTIONAL)

	Maintenance	Friction	Repair
Easy Road	•	•	•

IVECO

ENGINE

Engine Model	Cursor 13
Total Displacement	12,900cm ³
Maximum Power	Standard: 530hp (387KW) @1,900rpm
Maximum Torque	Standard: 2,400Nm @950rpm

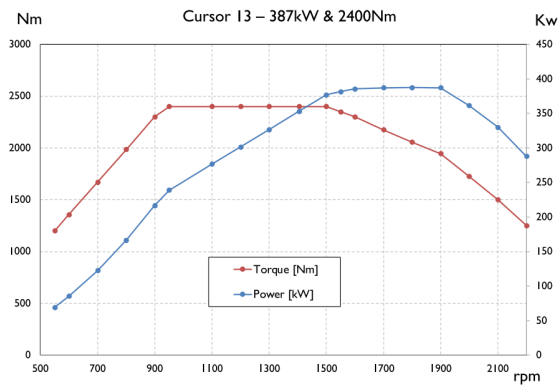

Injection Type	Direct
Fuel Injection System	Common Rail
Bore & Stroke	135 & 150mm
After-Treatment System	Hi-e SCR After-Treatment System with DOC: Diesel Oxydation Catalyst DPF: Diesel Particulate Filter SCR: Selective Catalytic Reduction CUC: Clean Up Catalyst
Emission Compliance	Euro VI STEP E

TRANSMISSION

Description	Automated Manual Transmission (AMT)	
Make & Model	ZF Traxon 12 TX 2640 TD	
Shifter Type	Dash Mounted Electronic Shifter with Column Mounted Sequential Shifter	
Gear Ratios: Traxon 12TX 2640 TD	1st: 16.69	7th: 3.66
	2nd: 12.92	8th: 2.83
	3rd: 9.93	9th: 2.17
	4th: 7.67	10th: 1.68
	5th: 5.90	11th: 1.29
	6th: 4.57	12th: 1.00
	Rev 1: 15.54	Rev 3: 3.4
	Rev 2: 12.03	Rev 4: 2.64

POWER TAKE-OFF

Rear Engine PTO	Without Rear Engine PTO
Gearbox Power Take-off Opening	Equipped
PTO Control	Equipped with Activation Switch and Electrics

REAR AXLE RATIO

Rear Axle Ratio	Standard: 2.83 Optional: 3.09
-----------------	----------------------------------

PERFORMANCE

Engine RPM @ 100km/h	1,617
Road Speed Limiter	100km/h, Conforms to ADR65

AXLE & SUSPENSION

Front Axle Model & Type	IVECO 5890/D ON -
Front Suspension	Parabolic Suspension with 4 Airbags
FA & Suspension Capacity	16,000kg
Rear Axle Model & Type	MT23-150/D - Tandem Single Reduction
Rear Suspension	8 Bellow Air Suspension with ECAS
Rear Dampers	Equipped
RA & Suspension Capacity	23,000kg
Axle Load Indicator	Equipped (with Pneumatic Suspension Only)
Differential Lock	Equipped

BRAKES & AUXILIARY BRAKES

Type/Control	Full Air/Electronic Braking System (EBS)
	- ABS (Anti-Lock Braking System)
	- ASR (Anti-Skid Regulator)
	- DBI (Direct Brake Integration)
	- BAS (Brake Assistant System)
	- BVR (Brake Lining Wear Adjustment)
	- ARB (Hill Holder)
	- ESC (Enhanced Stability Control)

Engine Brake with 3 Level Retardation	Equipped
Transmission Intarder	Optional

CHASSIS

Dimensions	304.4 x 80 x 7.7mm
Chassis Width (at rear)	771.4mm
Material	Steel
Tensile Strength	610N/mm ²
Exhaust Pipe	Chassis Mounted ATS & Horizontal Pipe
Air Tanks	Aluminium
Front Tow Hook	Equipped
Towing Cross Member	N/A

WHEELS & TYRES

Rim Type	10-Stud Disc Wheel (ISO type) PCD 335mm Finish: Alcoa Alloy
Rim Size	22.5" x 8.25"
Tyre Size	Front and Rear 275/70R22.5 Optional 295/80R22.5

ADBLUE® TANK

Fuel Tank with Lockable Cap	480L
AdBlue® Tank	50L

STEERING

Telescopic & Tilt Adjustable Steering Column	Standard
Steering Wheel	Leather Steering Wheel with the following:
	- Controls for the Information Screen
	- Controls for the Phone
	- Activation for Voice Recognition
	- Controls for ACC (Adaptive Cruise Control)
	- Controls for Radio/Media Volume



8x4 RIGID
530hp

FUEL SAVING FEATURES

GPS-Predictive Drive	Equipped
Eco-Roll	Equipped
EcoSwitch	Equipped

SERVICE INTERVALS

Engine Oil Change Interval ²	75,000km/12 Months
---	--------------------

²Based on normal operating conditions and may be reduced when operating under severe conditions.

SAFETY FEATURES

Electronic Stability Programme (ESP)	Equipped
Anti-Lock Brake System (ABS)	Equipped
Anti-Slip Regulator (ASR)	Equipped
Advanced Emergency Braking System (AEBS)	Equipped
Adaptive Cruise Control (ACC)	Equipped
Lane Departure Warning System (LDWS)	Equipped
Reverse Buzzer	Equipped
Daytime Running Lamp (DRL)	Equipped
ECE-R29 Cab Strength Certification	Equipped
ECE-R93 Front Underrun Protection (FUP)	Equipped

ELECTRICAL & ELECTRONICS

Voltage	24V System
Batteries	2x 12 Volt/220Ah Batteries
Electrical Battery Cutout	Equipped
Battery Position	Chassis Mounted LHS
Alternator	28Volt/120A Smart Alternator
Fleet Management System Data Interface (FMS)	Equipped
Chassis Mounted Jump Start Plug	Equipped
CAN OPEN Bodybuilder Interface	Equipped
LED Headlamp - Low Beam	Equipped
LED Headlamp - High Beam	Equipped
Daytime Running Lamp (DRL)	Equipped
Fog Light with Cornering & Bending	Equipped
LED Rear Lights	Equipped
Chassis Mounted Pneumatic Horn	Equipped
7-pin Trailer Connection	Equipped

CAB EXTERIOR

Cab Type	Low Roof Sleeper Cab (AS)
Cab Tilt Mechanism	Servo Assisted Cab Tilt Mechanism
Cab Mounting	Air Suspended Front and Rear
Windscreen Wipers	Automatic - Rain Sensing 2 Speed with Integrated Washer Nozzles
Front Bumper	Multi-Piece Hybrid (Plastic + Metal) Front Bumper with Foldable Step
Rearview Mirrors	2 x Motorised, Heated Flat Main Mirrors & Convex Spotters 1 x LHS Kerb View & Front View Mirrors
External Sunvisor	Equipped
Full Aerodynamic Kit	Equipped
Colour	White IC 194


CAB INTERIOR

Seating Capacity	Two
Driver Seat	Standard: Fabric, Air suspended, Heated, 3-Way Adjustable Seat Optional: Leather, Air Suspended, Ventilated, 3-Way Adjustable Seat
Passenger Seat	Standard: Fabric, Air Suspended, Heated, 3-Way Adjustable Seat Optional: Leather, Air Suspended, Heated, 3-Way Adjustable Seat
Seat Belt	3-Point Lap/Sash Type
Sun Visor & Overhead Consoles	Equipped on Both Driver & Passenger Side
Sleeper Berth with Net Protection - ADR 42 Compliant	Equipped
Multimedia Unit	7" LCD HD Touch Screen Display DAB + AM/FM Radio USB Input, Bluetooth® Connectivity Smart Phone Mirroring -Apple CarPlay® -Android Auto® Voice Recognition In Built Tom Tom Satellite Navigation System Reverse/Side Camera Compatible Optional: Voice Assist (Powered by Amazon Alexa®) USB Charging Ports (TYPE A) 12 Volt Power Socket
HVAC System	Equipped - with Climate Control Optional: with Integrated Parking Cooler
Immobiliser	Equipped - with 3 x Remote Central Lock Keys
Power Windows	Equipped
Cup Holders	Equipped
Interior Lighting	LED Internal Lights
Ambience Lighting	With Ambience Lighting
Rollup Sun Blinds for Doors	Equipped
Roof Hatch	Equipped
Refrigerator	50L+50L Refrigerator (Storage box + Fridge/Freezer)
Bunk Curtains	Equipped

IVECO TELEMATICS

Telematics Hardware	Equipped (GSM & GPS & Antenna & 4G SIM) with Provision for Mobile Cradle. Upon Subscription. Features Include: - MYIVECO Smart Report - MYIVECO Web Portal & Mobile App - MYIVECO Vehicle Monitoring & Remote Assistance - MYIVECO Easy Way App
Smart Connectivity Pack (Included for 5 Years)	

Application: RIGID

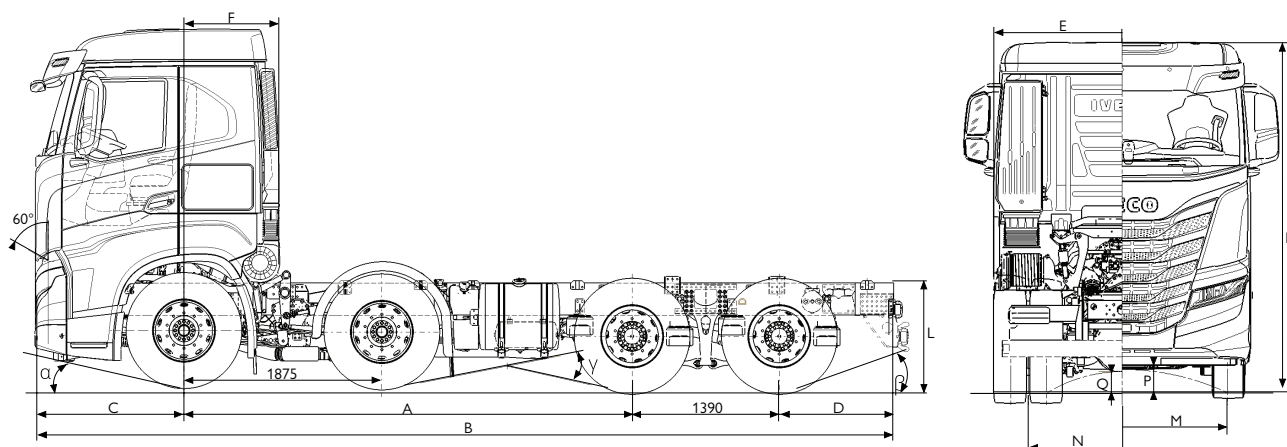

DIMENSIONS & WEIGHTS

Wheelbase	'A'	5,300mm	5,600mm
Overall Length	'B'	10,538mm	10,838mm
Max Width over Fenders	'E'	2,550mm	2,550mm
Overall Height - Low Roof	'K'	3,396mm	3,396mm
Overall Height - High Roof	'K'	3,811mm	3,811mm
Unladen Chassis Height - 275 Tyres	'L'	968mm	968mm
Unladen Chassis Height - 295 Tyres	'L'	1,009mm	1,009mm
Laden Chassis Height - 275 Tyres	'L'	954mm	954mm
Laden Chassis Height - 295 Tyres	'L'	995mm	995mm
Front Axle to Back of Cab - Including Filter	'F'	940mm	940mm
Front Overhang	'C'	1,410mm	1,410mm
Rear Overhang	'D'	1,218mm	1,218mm
Front Track	'M'	2,044mm	2,044mm
Rear Track	'N'	1,820mm	1,820mm
Approach Angle (°)	'α'	12°	12°
Departure Angle (°)	'β'	18°	18°
Ramp Angle (°)	'γ'	23°	23°
Total Vehicle Kerb Weight*		10,321kg	10,525kg
Kerbweight on Front Axle*		7,271kg	7,297kg
Kerbweight on Rear Axle*		2,050kg	3,228kg
Gross Vehicle Mass (Plated)		30,000kg	30,000kg
Gross Combination Mass (Plated)		60,000kg	60,000kg

Notes: *Indicative chassis tare mass with Standard options, without fuel, Adblue® and driver. ±3% tolerance apply
Approximate mass of the optionals: AS High roof cab: 170kg

VERSION: 5 VERSION DATE: 08/2026

IVECO TRUCKS AUSTRALIA LIMITED TRADING AS IVECO TRUCKS NEW ZEALAND.
1 JERRY GREEN ST, WIRI, AUCKLAND 2104, NEW ZEALAND. PHONE: 0800 2 IVECO. WWW.IVECO.CO.NZ

THE INFORMATION IN THIS DOCUMENT WAS CORRECT AT THE DATE OF REVISION. THE DATA IN THIS DOCUMENT IS APPROXIMATE. IF AN EXACT WEIGHT OR DIMENSION IS REQUIRED PLEASE CONTACT IVECO NZ. ALWAYS CONSULT IVECO NZ FOR THE LATEST INFORMATION ON THE VEHICLE BEFORE DECIDING TO PLACE AN ORDER.

OVERSEAS IMAGES AND ILLUSTRATIONS ARE SHOWN THROUGHOUT THIS DOCUMENT AND IMAGES MAY REFER TO EQUIPMENT THAT IS OPTIONAL.
THE MODELS DESCRIBED CAN BE SUBJECT TO MODIFICATIONS WITHOUT ANY NOTICE BY THE MANUFACTURER.